

B100 SERIES


1WATT

DC-DC CONVERTERS

1400 PROVIDENCE HIGHWAY • BUILDING 2
 NORWOOD, MASSACHUSETTS 02062-5015

FEATURE

- * Industry Standard SIP and SMD Packages
- * Efficiency up to 82%
- * 1000VDC Isolation
- * Low Cost
- * Unregulated Outputs
- * Low Ripple and Noise




MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		%	CASE
				NO LOAD	FULL LOAD	EFF.	
B101	5 VDC	5 VDC	200 mA	40 mA	250mA	80	Miniature
B102	5 VDC	12 VDC	84 mA	40 mA	252mA	80	Miniature
B103	5 VDC	15 VDC	67 mA	40 mA	250mA	80	Miniature
B108	5 VDC	±12 VDC	42 mA	40 mA	255mA	79	Miniature
B109	5 VDC	±15 VDC	33 mA	40 mA	251mA	79	Miniature
B107	5 VDC	±5 VDC	100 mA	40 mA	267mA	75	Miniature
B111	12 VDC	5 VDC	200 mA	15 mA	103mA	81	Miniature
B112	12 VDC	12 VDC	84 mA	15 mA	102mA	82	Miniature
B113	12 VDC	15 VDC	67 mA	15 mA	102mA	82	Miniature
B118	12 VDC	±12 VDC	42 mA	15 mA	104mA	81	Miniature
B119	12 VDC	±15 VDC	33 mA	15 mA	101mA	82	Miniature
B117	12 VDC	±5 VDC	100 mA	15 mA	107mA	78	Miniature

NOTE : 1. Nominal Input Voltage 5 or 12 VDC

All Dimensions In Inches(mm)
 Tolerance Inches Millimeters
 X XX±0.01 X XX±0.25
 X XXX±0.005 X XXX±0.13
 Pin ±0.002 ±0.05


SIP PACKAGES

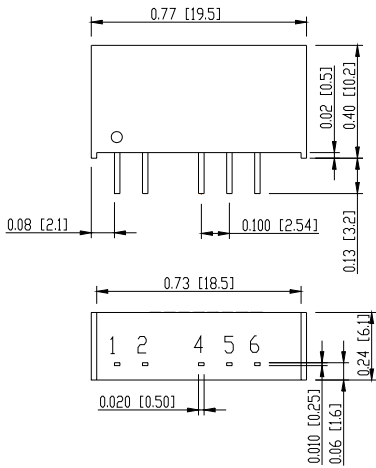

PIN CONNECTION		
Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
4	-Vout	-Vout
5	No Pin	Common
6	+Vout	+Vout

NA: Not Available for Electrical Connection

SMD PACKAGES

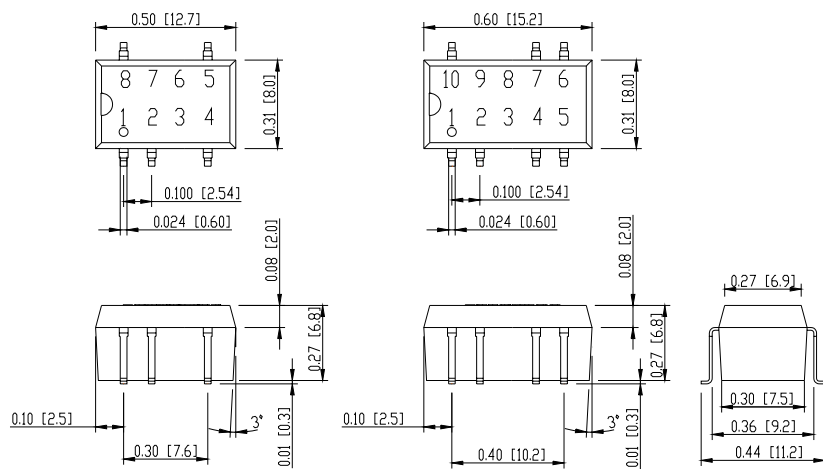

PIN CONNECTION	
Pin	Single Output
1	-Vin
2	+Vin
3	No Pin
4	-Vout
5	+Vout
6	No Pin
7	No Pin
8	NA

PIN CONNECTION	
Pin	Dual Output
1	-Vin
2	+Vin
3	No Pin
4	Common
5	-Vout
6	NA
7	+Vout
8	No Pin
9	No Pin
10	NA